

Cover Roller Spa Cover Removal System

INSTRUCTIONS

PARTS LIST

| DESCRIPTION | QTY |
|-----------------------------|-----|
| A. Roller Rack | 2 |
| B. #10 x 1" Mounting Screws | 12 |

Tools Needed: Power/Cordless Drill with Phillips bit and a tape measure.



1 Position one **Roller Rack (A)** so it is halfway between the spa edge and the midline (*Figure 1*) and its top surface is flush with the top of the spa (*Figure 2*). Mark the position of the rack's 6 screw holes in the skirt. Repeat this procedure with the other **Roller Rack (A)** on the opposite side of the midline.

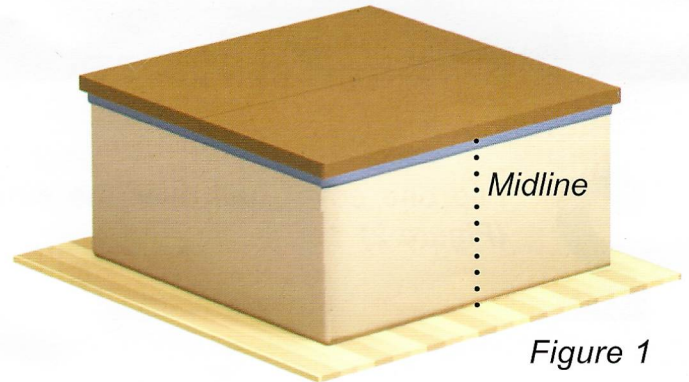


Figure 1

2 Secure each **Roller Rack** to the spa skirt by inserting all six **#10 screws (F)** tightly into the screw holes that you marked in the previous step. (*Figure 3*)

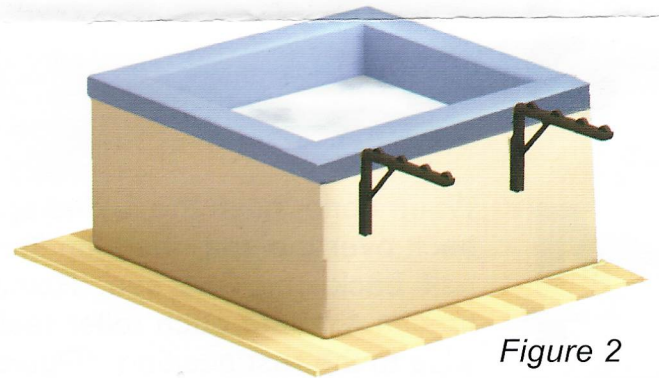


Figure 2

PRO TIP

If your spa cover is heavy, it is probably saturated with water. Water saturated foam-filled covers have very little insulating "R" value and their access weight will damage the roller system. If your cover is water saturated, it is time to purchase a new cover.



Figure 3

How to Use

- 1 Lock each of the **Roller Racks** into position by rotating counterclockwise, then securing the bottom edge of the brace (*Figure 1*).

PRO TIP

Do not extend the roller rack arm more than 90° upward, or damage to the joint may result.

- 2 Flip one cover half over the other. (*Figure 2*)

- 3 Push the spa cover on top of the roller racks. Now, enjoy your spa! (*Figure 3*)

- 4 When done, push the folded spa cover back over the spa, then flip the upside half back onto the spa. Release the braces & rotate each roller rack clockwise to the rest position. (*Figure 4*)

Figure 1

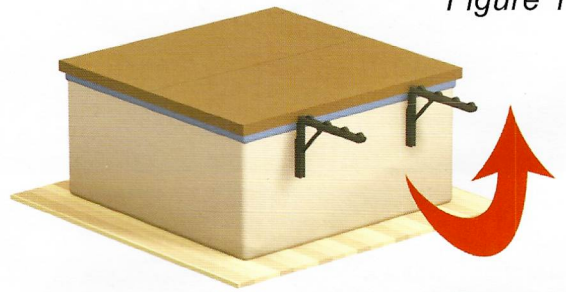


Figure 2



Figure 3



Figure 4



Warnings

- **DO NOT** sit on open cover. DAMAGE WILL RESULT.
- **DO NOT** mount roller racks on the front or the equipment side of spa. DAMAGE WILL RESULT.
- **DO NOT** twist or move roller racks sideways. DAMAGE WILL RESULT.
- **DO NOT** allow weight resting on the roller system to exceed 75 lbs. DAMAGE WILL RESULT.
- For safety reasons, the roller system should be secured in the lowered position after each use.
- If there is snow on the cover, remove all snow before opening or DAMAGE WILL RESULT.